# SKYFLOR® Modular Glass Deck System Reinventing Decks With Walk On Glass

### Glass Make-up

Glazing Option A: 10mm top layer - Low Iron Tempered YorLux (Top) 1.52mm interlayer DG Structural 10mm middle layer - Low Iron Tempered (Middle) 1.52mm interlayer DG Structural 10mm bottom layer - Low Iron Tempered with back painted border (Bottom)

**Glazing Option B:** 10mm top layer - Low Iron Tempered NanoDot (Top) 1.52mm interlayer DG Structural 10mm middle layer - Low Iron Tempered (Middle) 1.52mm interlayer DG Structural 10mm bottom layer - Low Iron Tempered with back painted border (Bottom)

> Patent #'s US 10,294,662B1

**GLASS** FLOORING SYSTEMS INC

- and informational purposes only.
- D.
- Systems Incorporate.

# CC-ES Evaluation Report ESR-5009

### **General Notes**

A. These drawings are the sole property of Glass Flooring Systems, Inc. and may not be used or duplicated without written consent from Glass Flooring Systems, Inc. Glass Flooring Systems, Inc.

assumes no responsibility for work and or errors incurred by other trades through the use of these drawings. B. All items marked "by others" are not supplied by Glass Flooring Systems, Inc. and are shown for coordination

C. Perimeter anchors, shims, backer rod, finish sealants and installation are the responsibility of the

installer.Glass Flooring Systems, Inc.shall not accept any responsibility for such materials.

Standard spacing between glass panels and between glass panels and frame are  $\frac{3}{8}$ "

User subject to "Terms and Conditions" in the user agreement for all products provided by Glass Flooring

# 128" x 96" MULTI-PANEL GFS128X96YL & GFS128X96ND

	Frame Components		
	Perimeter Frame Type		
	SkyFloor® Modular Glass		
	Deck (Perimeter)		
	Cross Beam Type		
	3.5" SkyFloor® Modular		
G	ass Deck (Flat Rafter Extrusion)		
Frame Finish			
	Standard Black		
MANUFACTURER	Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871		
PROJECT	SkyFloor® Modular Glass Deck System - 128X96		
	ALL ELEVATIONS ARE VIEWED FROM EXTERIOR / NOT TO SCALE	_	
DRAWN DATE GFS 6/4/24	GFS128X96YL & GFS128X96ND		

dated January 2019.

7.0 IDENTIFICATION

conformity.

Decking (by others)

Min. 3/8" Bead of 🛛 🛏 Backer Rod

Glass Panels

Silicone



**ICC-ES Evaluation Report** ESR-5009

### DIVISION: 09 00 00—FINISHES Section: 09 62 83—Structural Glass Flooring

### **REPORT HOLDER:**

GLASS FLOORING SYSTEMS, INC.

EVALUATION SUBJECT:

### SKYFLOOR<sup>®</sup> MODULAR GLASS DECK SYSTEM

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018 and 2015 International Building Code (IBC)
- Property evaluated: Structural

### 2.0 USES

The SkyFloor<sup>®</sup> Modular Deck System has been shown to comply with IBC 2409.1 for use in exterior deck systems. 3.0 DESCRIPTION:

The SkyFloor<sup>®</sup> Modular Deck System components consist of glass panels, silicone, backer rod, EPDM setting blocks

and aluminum frames (6063 T6). The glass panels must be continuously supported around the perimeter. 3.1 Glass Panels:

The laminated glass panels must comply with ASTM C1172 and comply with Category II of CPSC 16 CFR Part 1201 or Class A of ANSI Z97.1.

- The individual layers of the laminated glass panels must be Kind FT fully tempered glass complying with ASTM C1048
- The PVB interlayers must have a minimum shear modulus of 60 psi for T  $\leq$  122°F (0.414 MPa for T  $\leq$  50°C).

The glass panels must consist of three glass layers and two interlayers. Each glass layer must have a nominal thickness of 0.394 inch (10.00 mm). The minimum actual thickness must not be less than 0.355 inch (9.02 mm). The PVB interlayers must have a minimum 0.060-inch (1.52 mm) thickness. The overall nominal thickness must be 1.30 inches (33.0 mm). The maximum size of the glass panels must be 32 inches by 48 inches (813 mm by 1219 mm).

Issued December 2022

This report is subject to renewal December 2023.

The top glass layer may contain textured or other disruptive surface treatments and the capacity reductions have been taken in account as noted in ASTM E2751. 3.2 Silicone:

The silicone must comply with ASTM C920 Type S, Grade NS, Class 50, Use NT, G and A and ASTM C1184. 4.0 DESIGN AND INSTALLATION

### 4.1 Design:

I-Codes provide recognition

in all 50 states Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543 A Subsidiary of the International Code Council®

The SkyFloor® Modular Deck System has an ASD allowable positive uniform live load capacity of 100 psf (4.8 KPa), an ASD allowable positive concentrated live load capacity of 300 lbs (1.33 kN) and an ASD allowable uniform wind load capacity of 20 psf (4.8 KPa). The maximum deflection at the allowable loads is less than L/175. 4.2 Installation:

Installation must comply with Figures 1 and 2. The glass panels must be continuously supported around the entire perimeter with a minimum 1.625 inch (41.3 mm) bearing width

### 5.0 CONDITIONS OF USE

- The SkyFloor<sup>®</sup> Modular Deck System described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:
- **5.1** The following is outside the scope of this report: Use as skylights; slip resistance; fire-resistance rated construction; and classified roofing assemblies
- **5.2** Attachment of the aluminum perimeter framing to supporting construction along with the supporting
- 5.3 All glass must be fully-tempered Type II laminated glass, with interlayers complying with Section 3.1. All glass must be fabricated and inspected in accordance with ASTM C1172. The glass fabricator must provide certification of compliance with ASTM C1172.

6.0 EVIDENCE SUBMITTED

6.1 Data in accordance with ASTM E2751, ASTM E1300, and ASTM E72.

construction itself is outside of the scope of this report.



FIGURE 1 - PERIMETER DETAIL BETWEEN GLASS PANELS AND DECKING (except for silicone, dimensions are shown for illustrative purposes only)

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

GLASS FLOORING

SYSTEMS INC

Copyright © 2022 ICC Evaluation Service, LLC. All rights reserved.



# ICC-ES Evaluation Report ESR-5009

**ESR-5009** | Most Widely Accepted and Trusted

### **6.2** Quality documentation in accordance with the ICC-ES Acceptance Criteria for Quality Documentation (AC10),

7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-5009) along with the name, registered trademark, or registered logo of the report holder [and/or listee] must be included in the product label. [Electronic labeling is the ICC-ES web address (<u>www.icc-es.org</u>); specific URL related to the report; or the ICC-ES machinereadable code placed on the aforementioned items.] 7.2 In addition, the SkyFloor® Modular Deck System components are packaged with a label bearing the report holder's name; product description; and the mark of conformity. The evaluation report number (ICC-ES ESR-4885) may be used in lieu of the mark of

> Black Ceramic Frit Back Paint **EPDM Setting Blocks Perimeter Framing** Fasteners (by others) Shîm (by others) Beam (by others)

> > Fascia (by others)


Beam (by others)

Joist Hanger (by others)

### Page 2 of 4

in this report and the applicable code. 7.3 The report holder's contact information is the following: **GLASS FLOORING SYSTEMS, INC.** 6 AARON WAY SPARTA, NEW JERSEY 07871 (862) 701-5320

www.glassflooringsystems.com wayne@glassflooringsystems.com

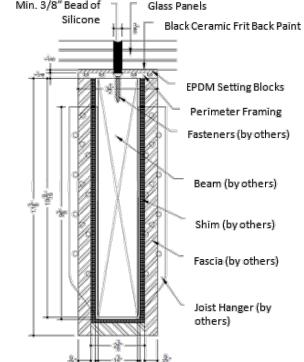




FIGURE 2 - PERIMETER DETAIL BETWEEN ADJACENT GLASS PANELS (except for silicone, dimensions are shown for illustrative purposes only)

### ICC-ES Evaluation Report

### The glass panels must also be identified as specified

DIVISION: 09 00 00—FINISHES Section: 09 62 83—Structural Glass Flooring **REPORT HOLDER:** 

GLASS FLOORING SYSTEMS, INC. EVALUATION SUBJECT:

ES ICC EVALUATION SERVICE\*

SKYFLOOR<sup>®</sup> MODULAR GLASS DECK SYSTEM

1.0 REPORT PURPOSE AND SCOPE Purpose:

The purpose of this evaluation report supplement is to indicate that the SkyFloor® Modular Deck System, described in ICC-ES evaluation report ESR-5009, has also been evaluated for compliance with the code(s) noted below. Applicable code edition:

www.icc-es.org | (800) 423-6587 | (562) 699-0543 A Subsidiary of the International Code Council®

■ 2022 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Departement of Health Care Access and Information (HCAI) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

2.0 CONCLUSIONS 2.1 CBC:

The SkyFloor® Modular Deck System, described in Sections 2.0 through 7.0 of the evaluation report ESR-5009, complies with CBC Chapters 16 and 24, provided the design and installation are in accordance with the 2021 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 16 and 24, as applicable. 2.1.1 OSHPD: The applicable OSHPD Sections of the CBC are beyond the scope of this supplement. **2.1.2 DSA:** The applicable DSA Sections of the CBC are beyond the scope of this supplement.

This supplement expires concurrently with the evaluation report, issued December 2022.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2022 ICC Evaluation Service, LLC. All rights reserved.

### ESR-5009 CBC Supplement

Issued December 2022 This report is subject to renewal December 2023.


SERVICE*	
ICC-ES Evaluation Report	ESR-5009 FBC Supplement Issued December 2022
	This report is subject to renewal December 2023.
<u>www.icc-es.org</u>   (800) 423-6587   (562) 699-0543	A Subsidiary of the International Code Council®
DIVISION: 09 00 00—FINISHES Section: 09 62 83—Structural Glass Flooring	
REPORT HOLDER:	
GLASS FLOORING SYSTEMS, INC.	
EVALUATION SUBJECT:	
SKYFLOOR <sup>®</sup> MODULAR GLASS DECK SYSTEM	
1.0 REPORT PURPOSE AND SCOPE Purpose:	
The purpose of this evaluation report supplement is to indicate evaluation report ESR-5009, has also been evaluated for compli	
Applicable code editions:	
2020 Florida Building Code—Building	
2.0 CONCLUSIONS	
The SkyFloor <sup>®</sup> Modular Deck System, described in Sections 2.0 with the 2020 Florida Building Code—Building. The design requirements noted in <i>Building Code—Building</i> . The installation requirements noted in <i>Building Code</i> <sup>®</sup> meet the requirements of the <i>Florida Building Code</i>	uirements must be determined in accordance with the <i>Florida</i> ICC-ES evaluation report ESR-5009 for the 2018 <i>International</i>
Use of the SkyFloor <sup>®</sup> Modular Deck System for compliance with <i>Building Code—Building</i> has not been evaluated, and is outside	
For products falling under Florida Rule 61G20-3, verification that a quality assurance entity approved by the Florida Building Con responsibility of an approved validation entity (or the code official Commission).	mmission for the type of inspections being conducted is the
This supplement expires concurrently with the evaluation report, is	sued December 2022.



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed to any finding or other matter in this report, or as to any product covered by the report. Copyright © 2022 ICC Evaluation Service, LLC. All rights reserved.



MANUF	ACTURER	Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871	
PROJECT		SkyFloor® Modular Glass Deck System - 128X96	
		ALL ELEVATIONS ARE VIEWED FROM EXTERIOR / NOT TO SCALE	
DRAWN GFS	DATE 6/4/24	GFS128X96YL & GFS128X96ND	SHEET 2 of 9

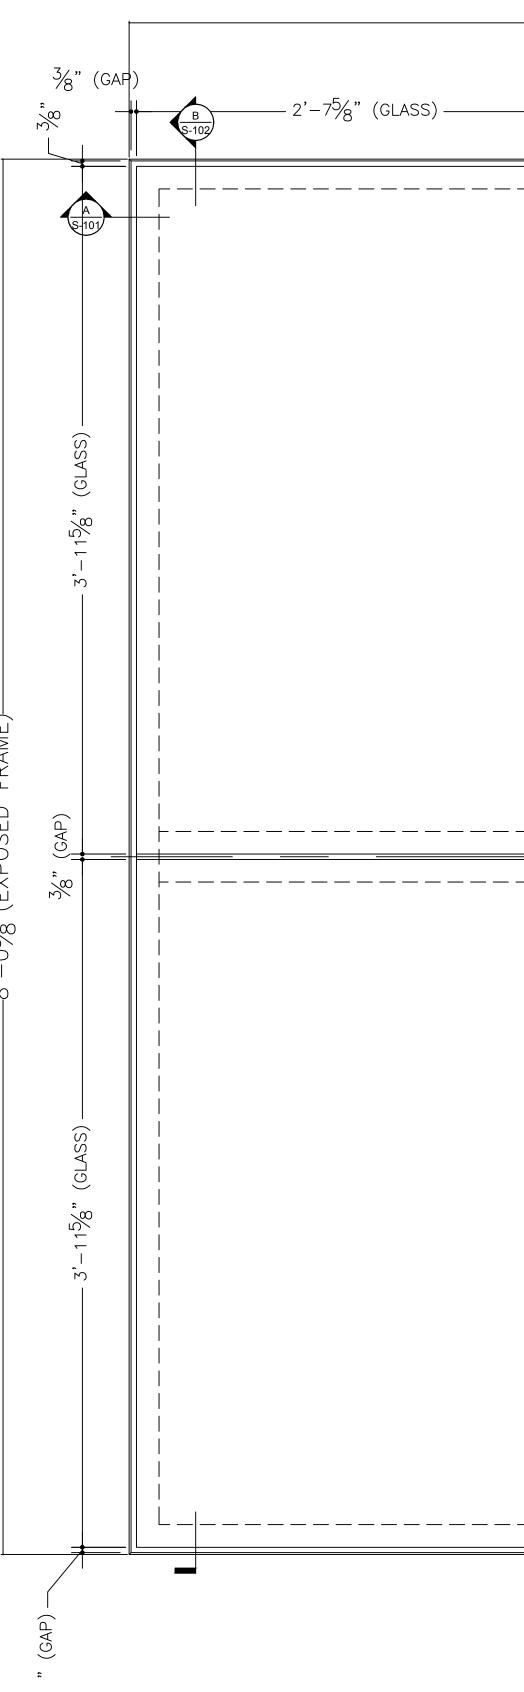





 $-10'-8\frac{5}{8}$ "(exposed frame)-

<sup>3</sup> ⁄8" (G	GAP) 2'-75/8"	3⁄8" (GLASS) ———————————————————————————————————	(GAP) 	'-7%" (GLASS)	3/8"	(GAP) 2'-75/
	   			·		
						$\downarrow \perp \_ \_ \_ \_ \_ \_ \_ \_$

### PLAN VIEW - MULTI-PANEL UNIT A

	]	
		<sup>3</sup> / <sub>8</sub> " (GAP)
75/8" (GLASS) ———		
	]	
	MANUFACTU	6 Aaron Way Unit 1
	PROJECT	Sparta, NJ 07871 SkyFloor® Modular Glass Deck System - 128X96
	<u> </u>	ALL ELEVATIONS ARE VIEWED FROM EXTERIOR / NOT TO SCALE


DRAWN

GFS

6/4/24

SHEET 3 of 9

**GFS128X96YL & GFS128X96ND** P-101

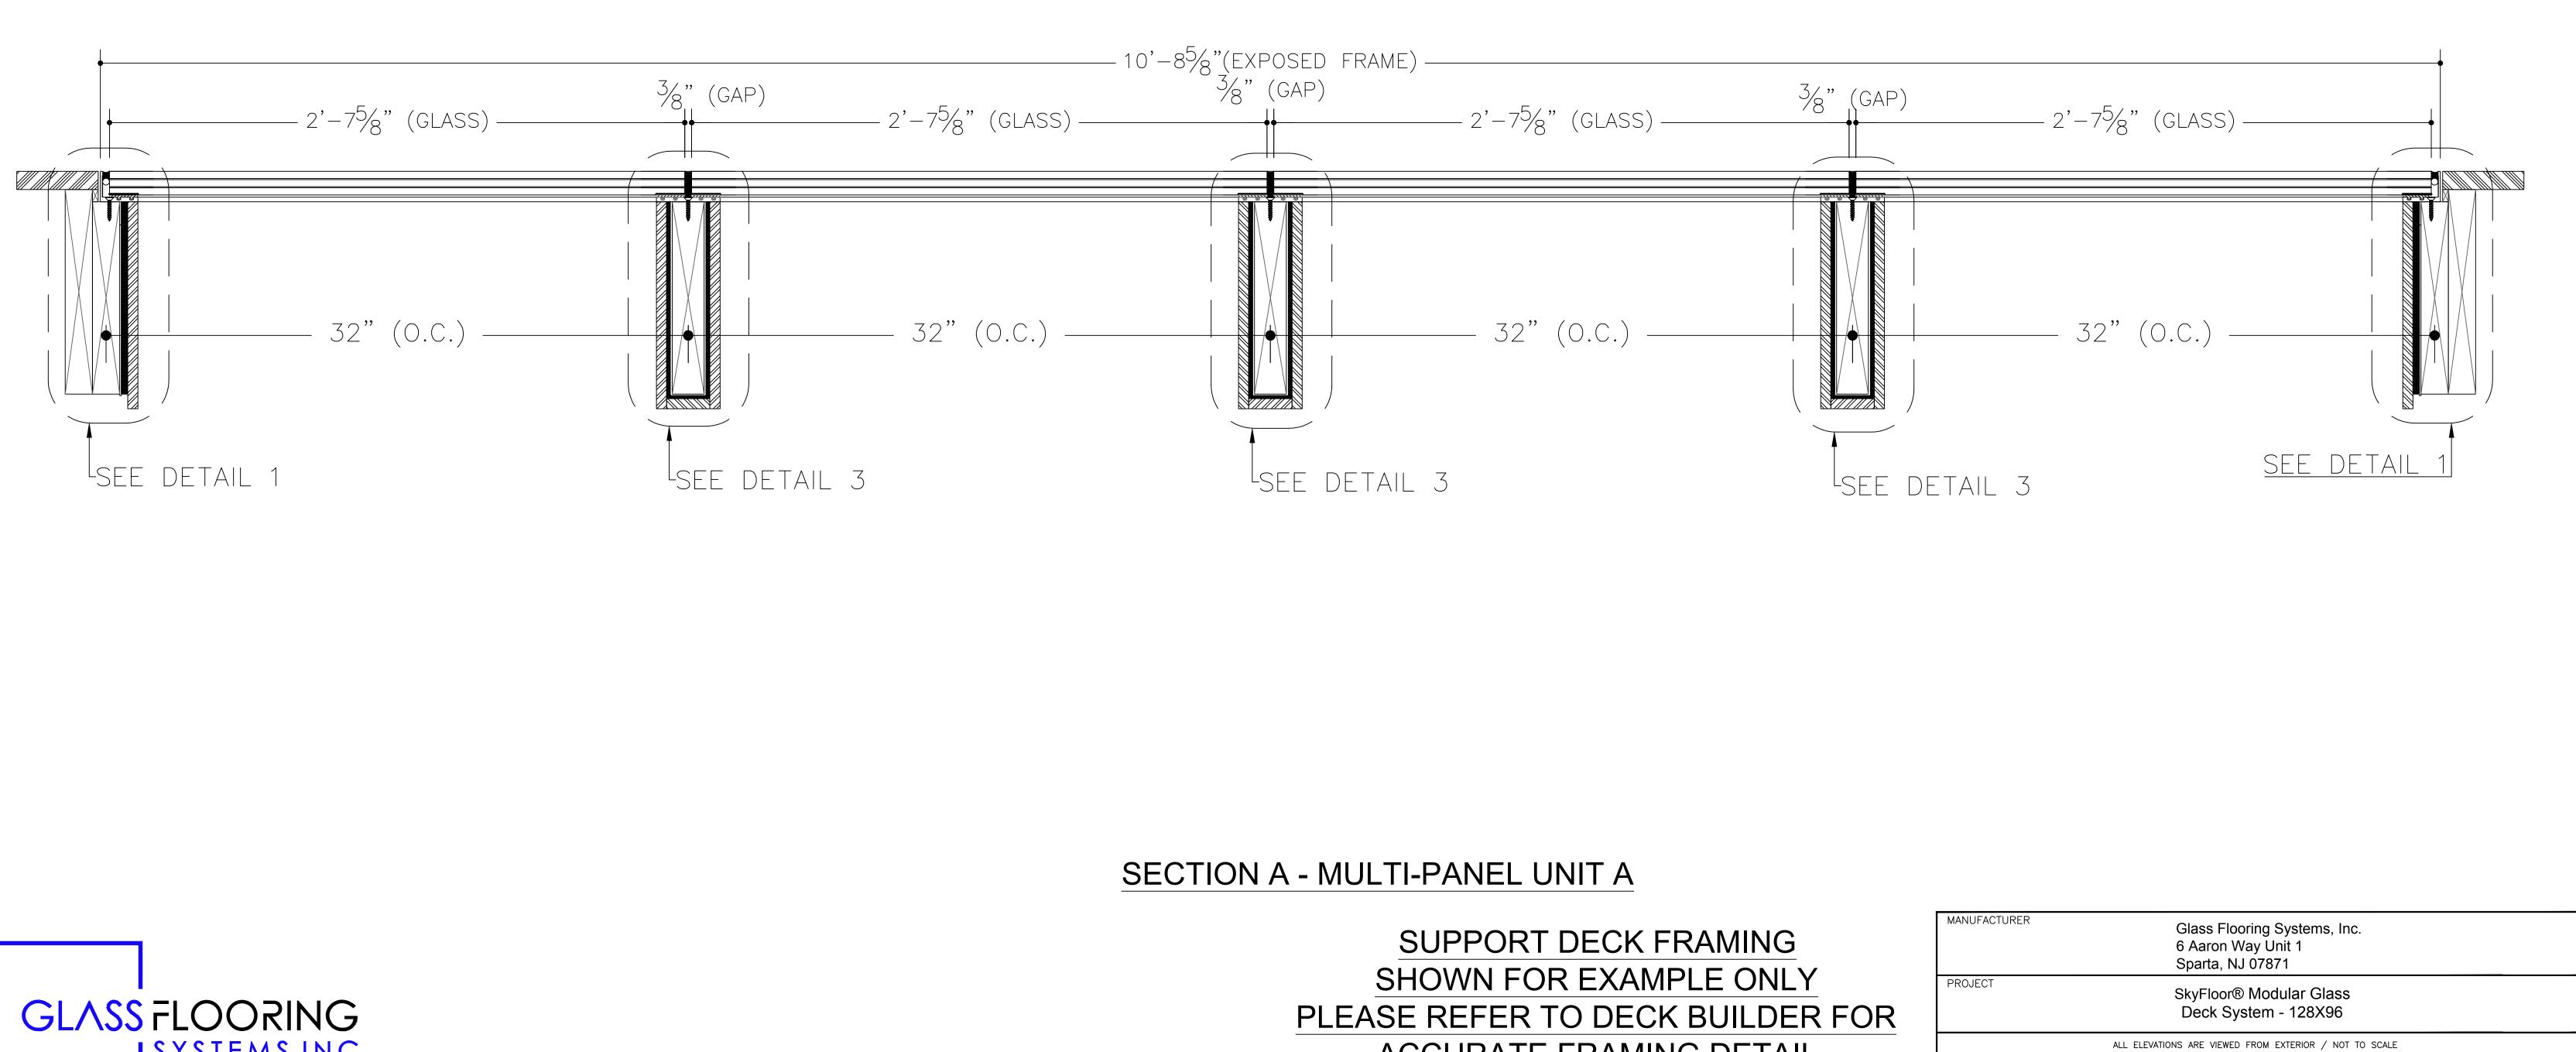



ACCURATE FRAMING DETAIL


DRAWN

GFS


6/4/24


GFS128X96YL & GFS128X96ND S-101

4 of 9

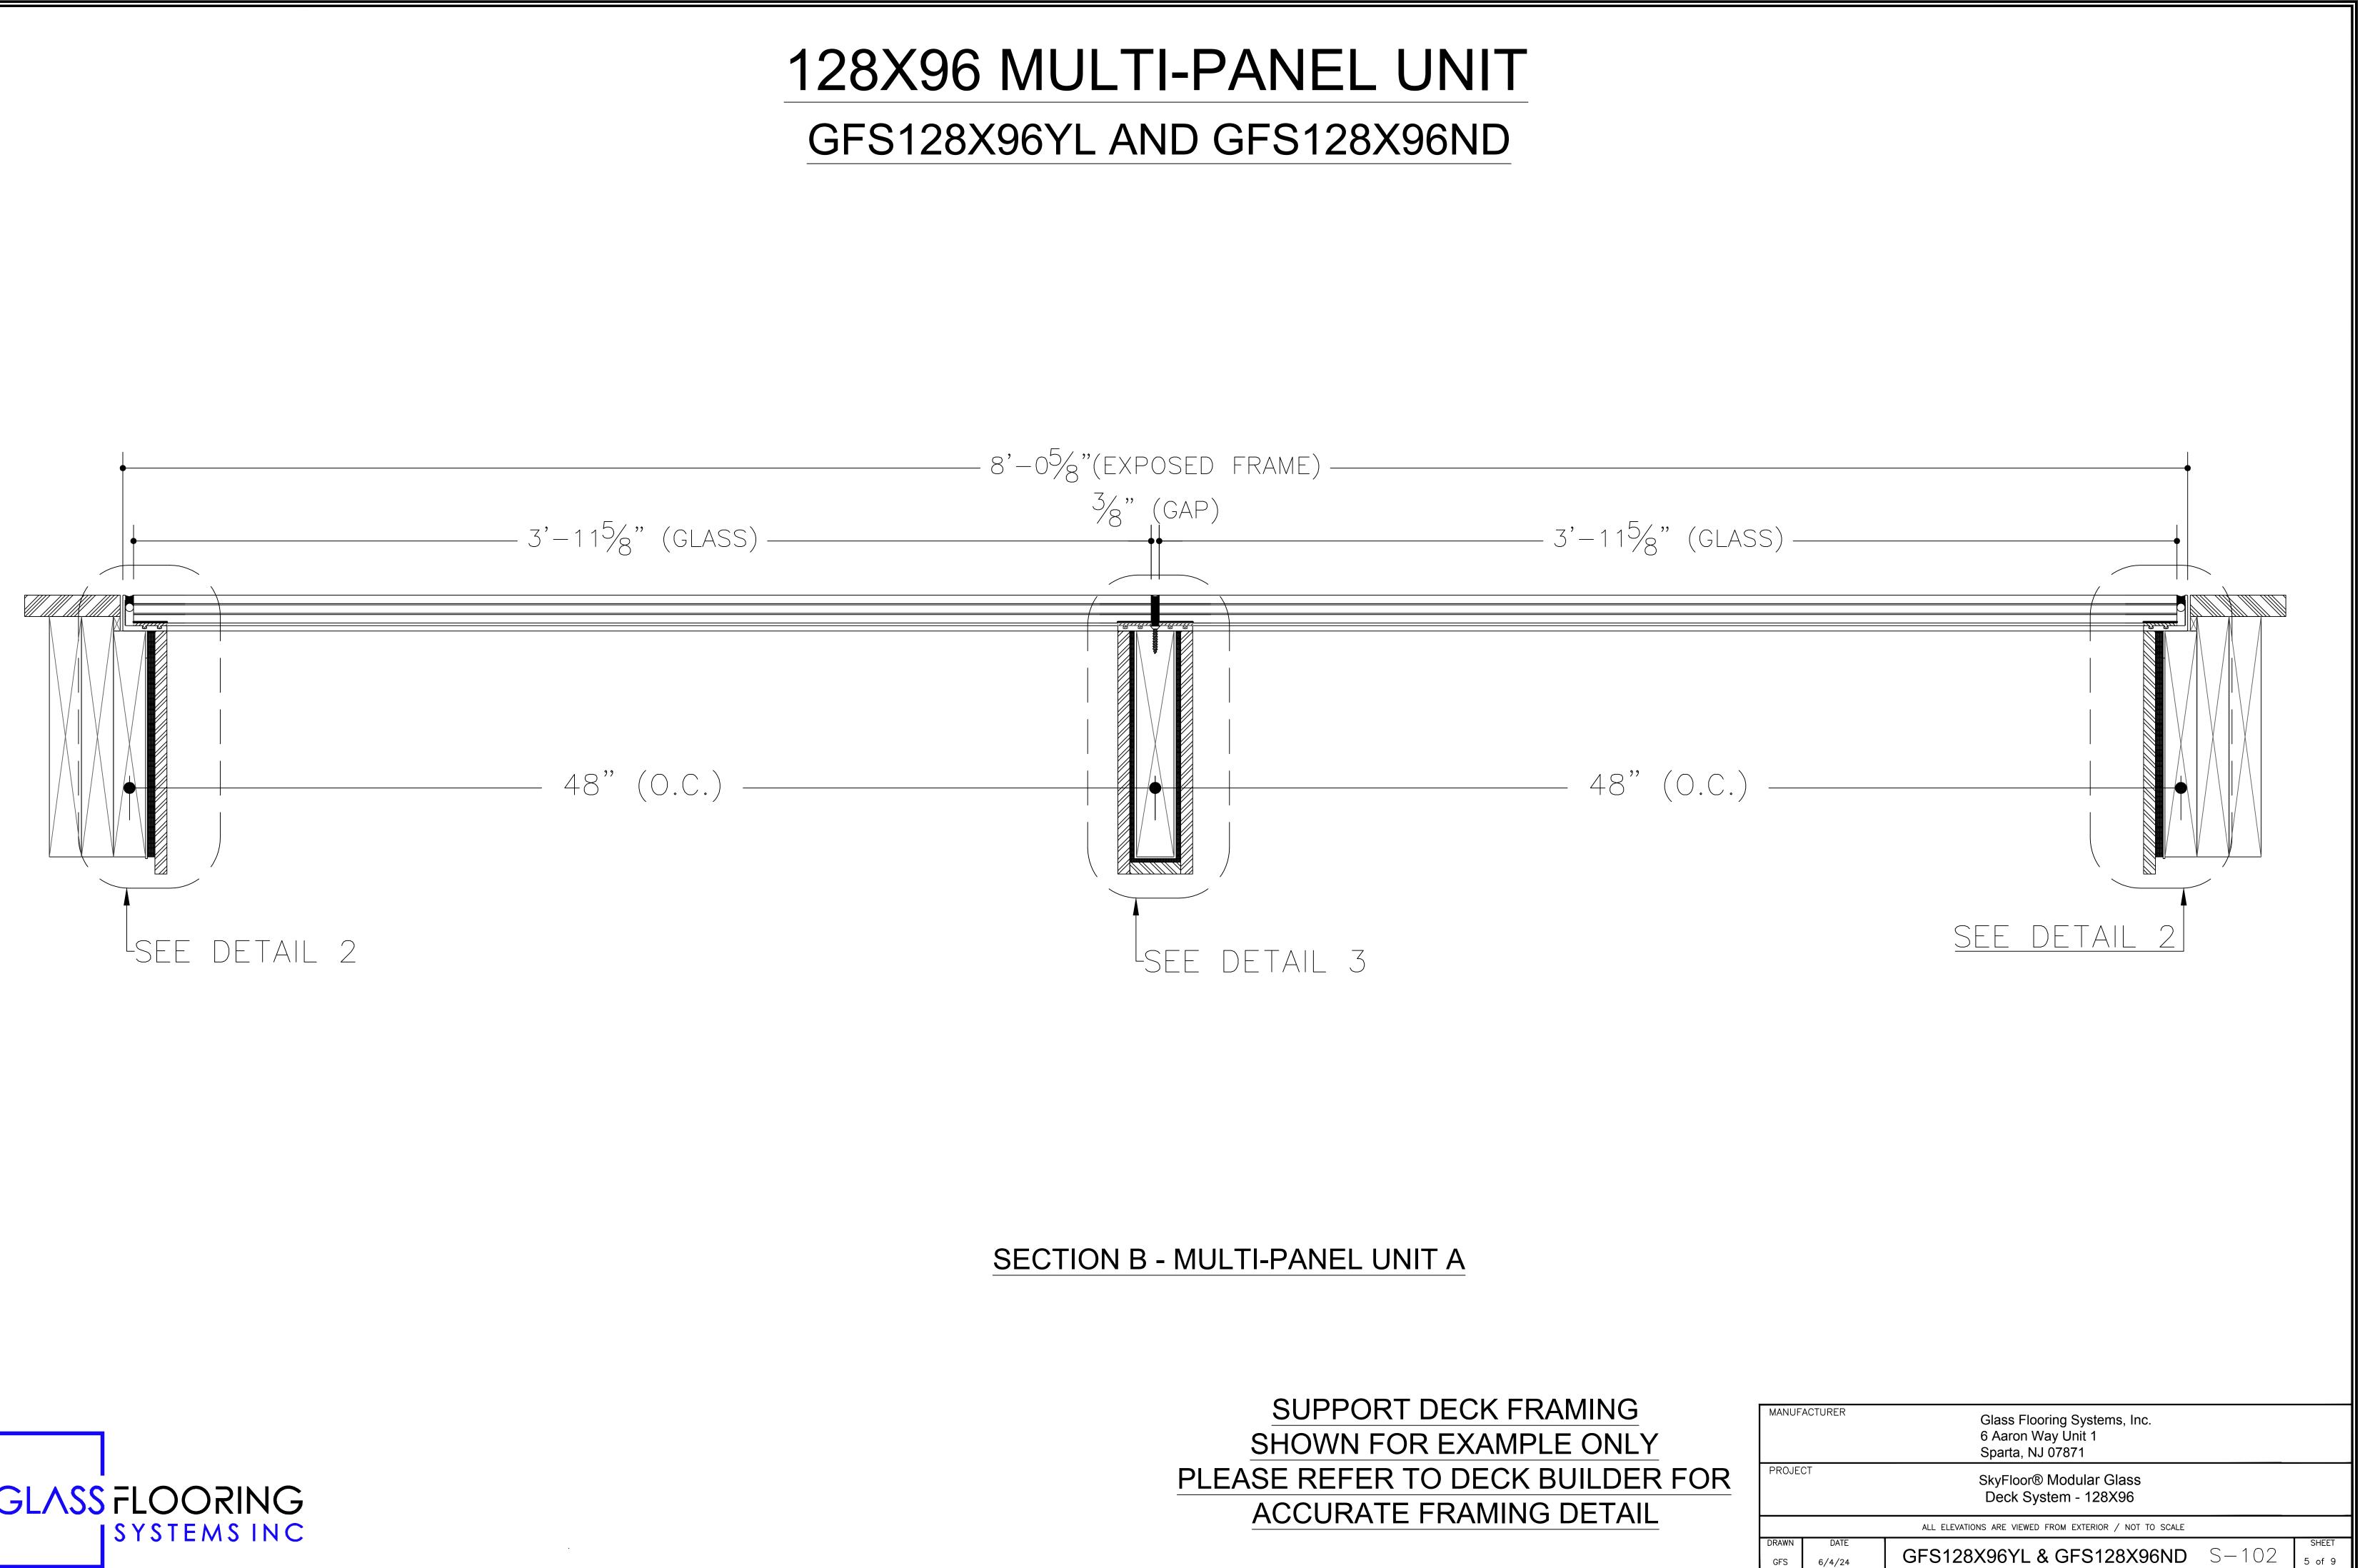




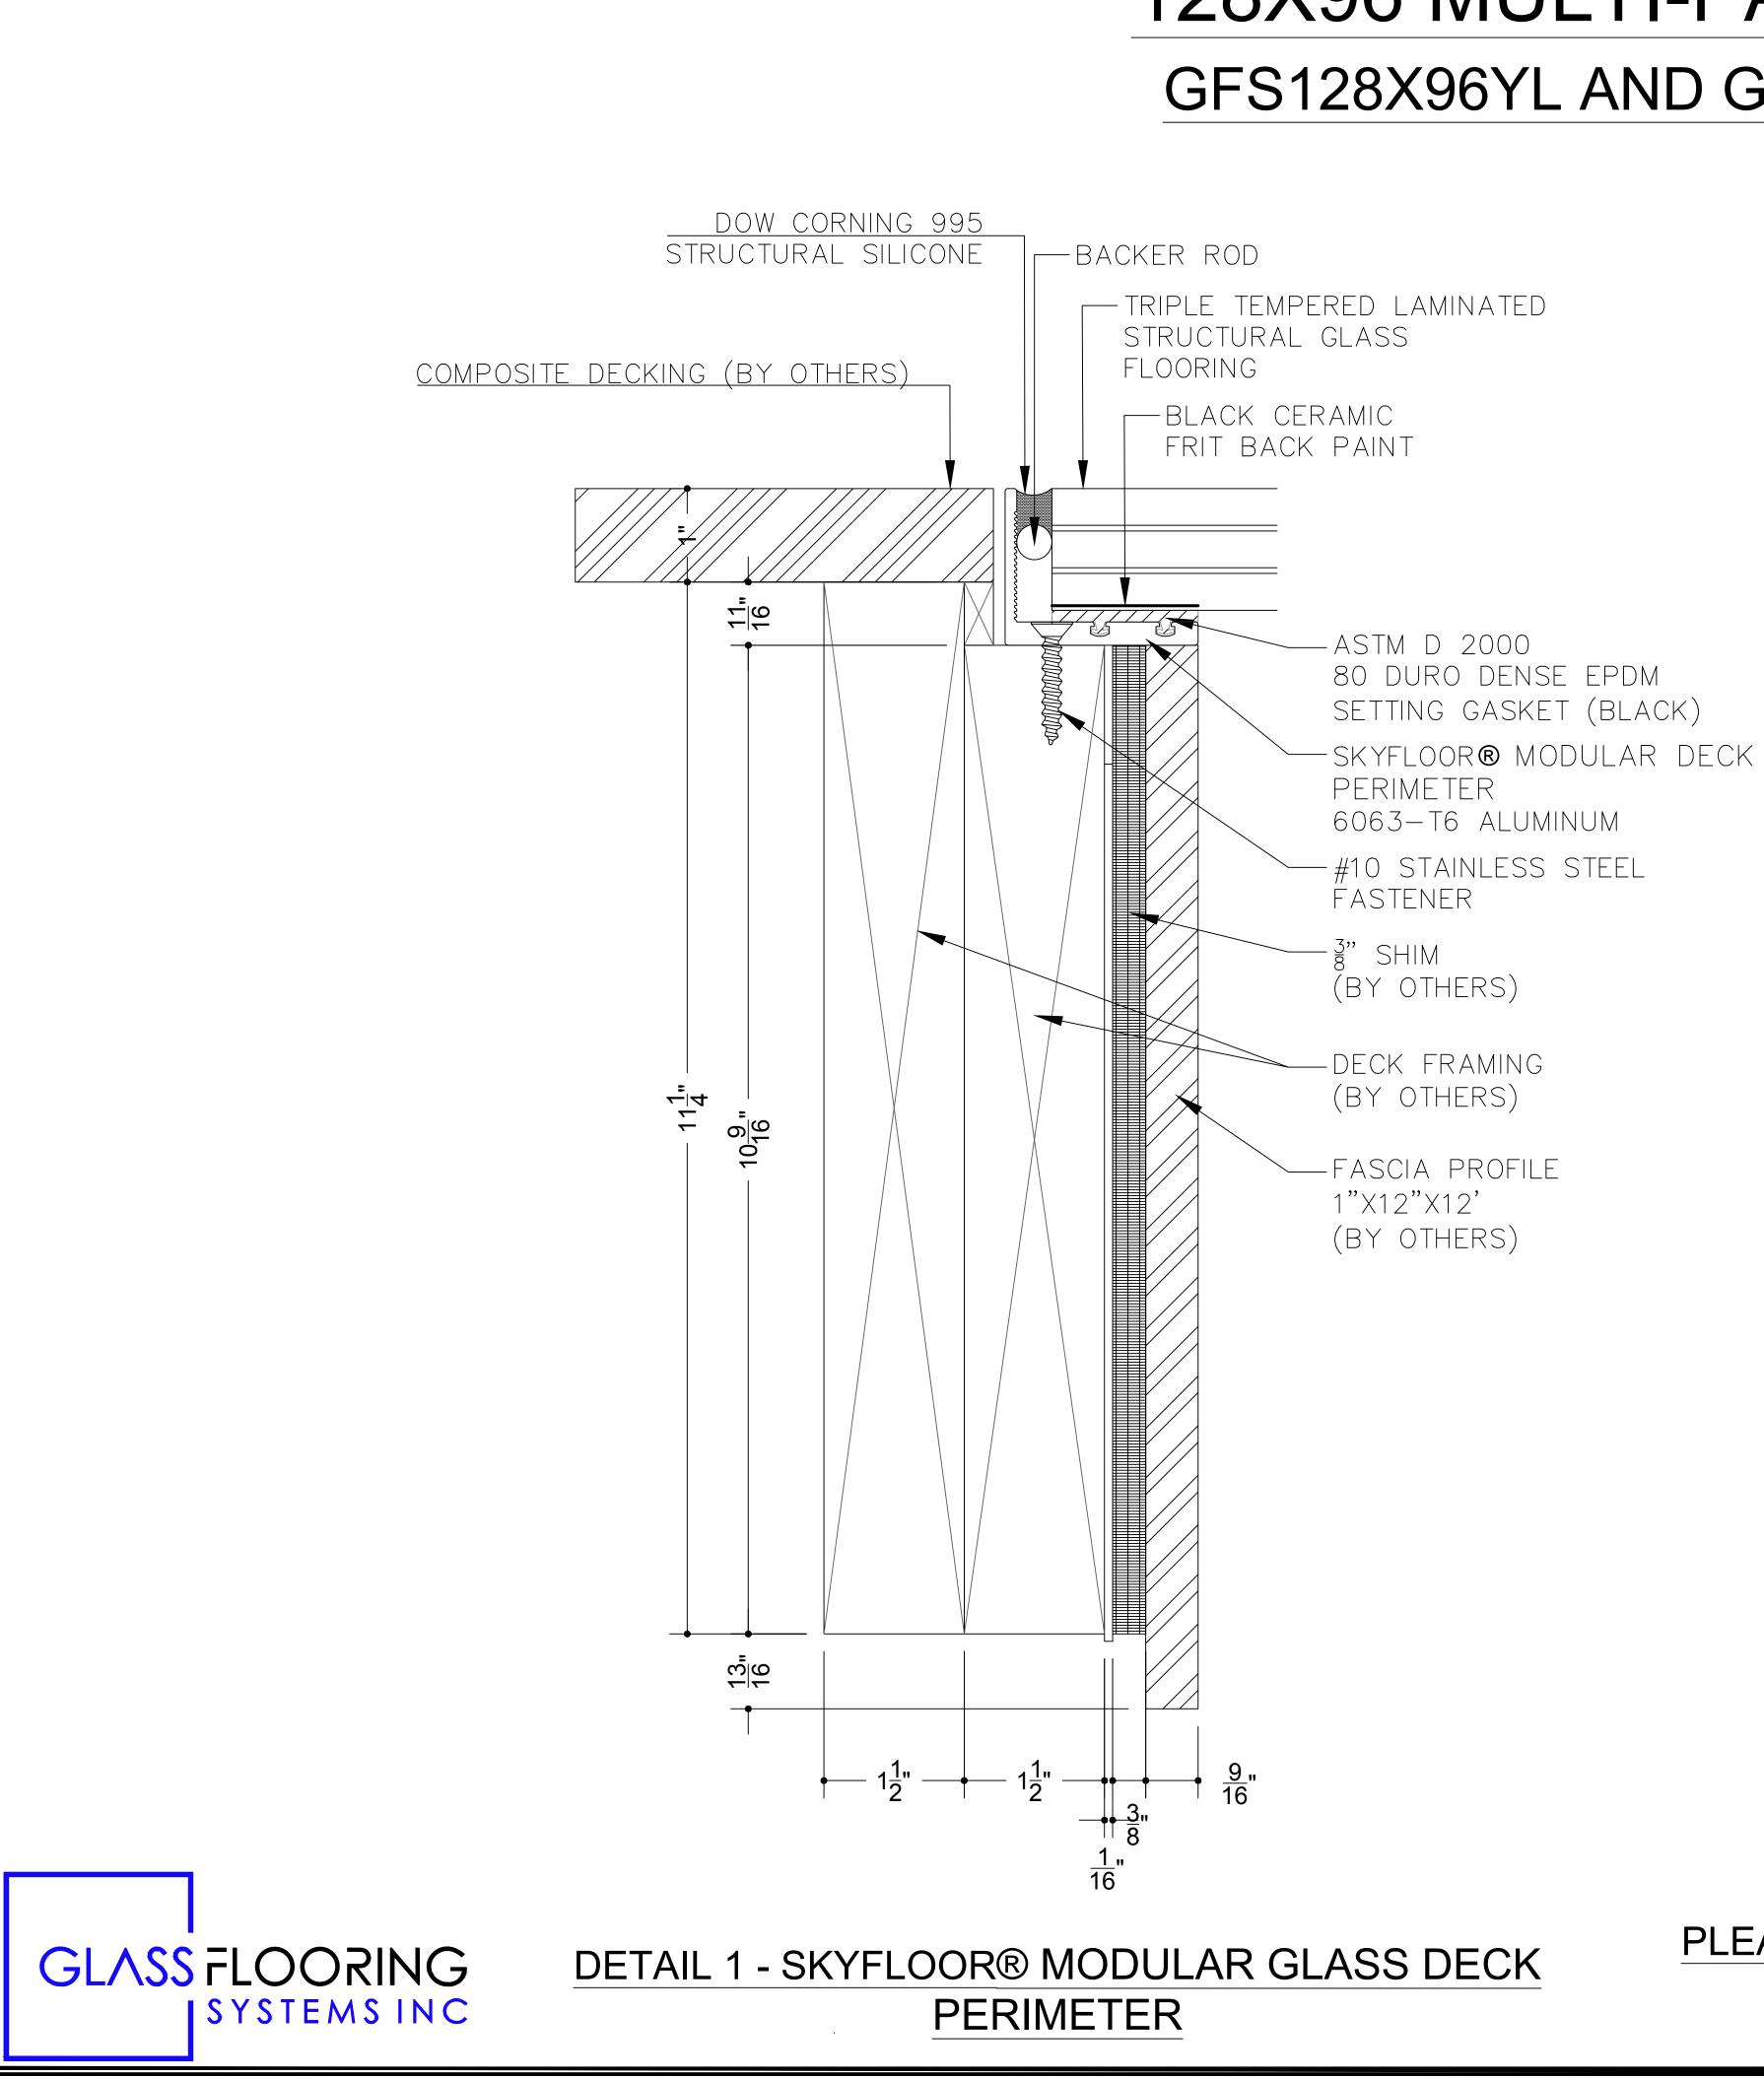

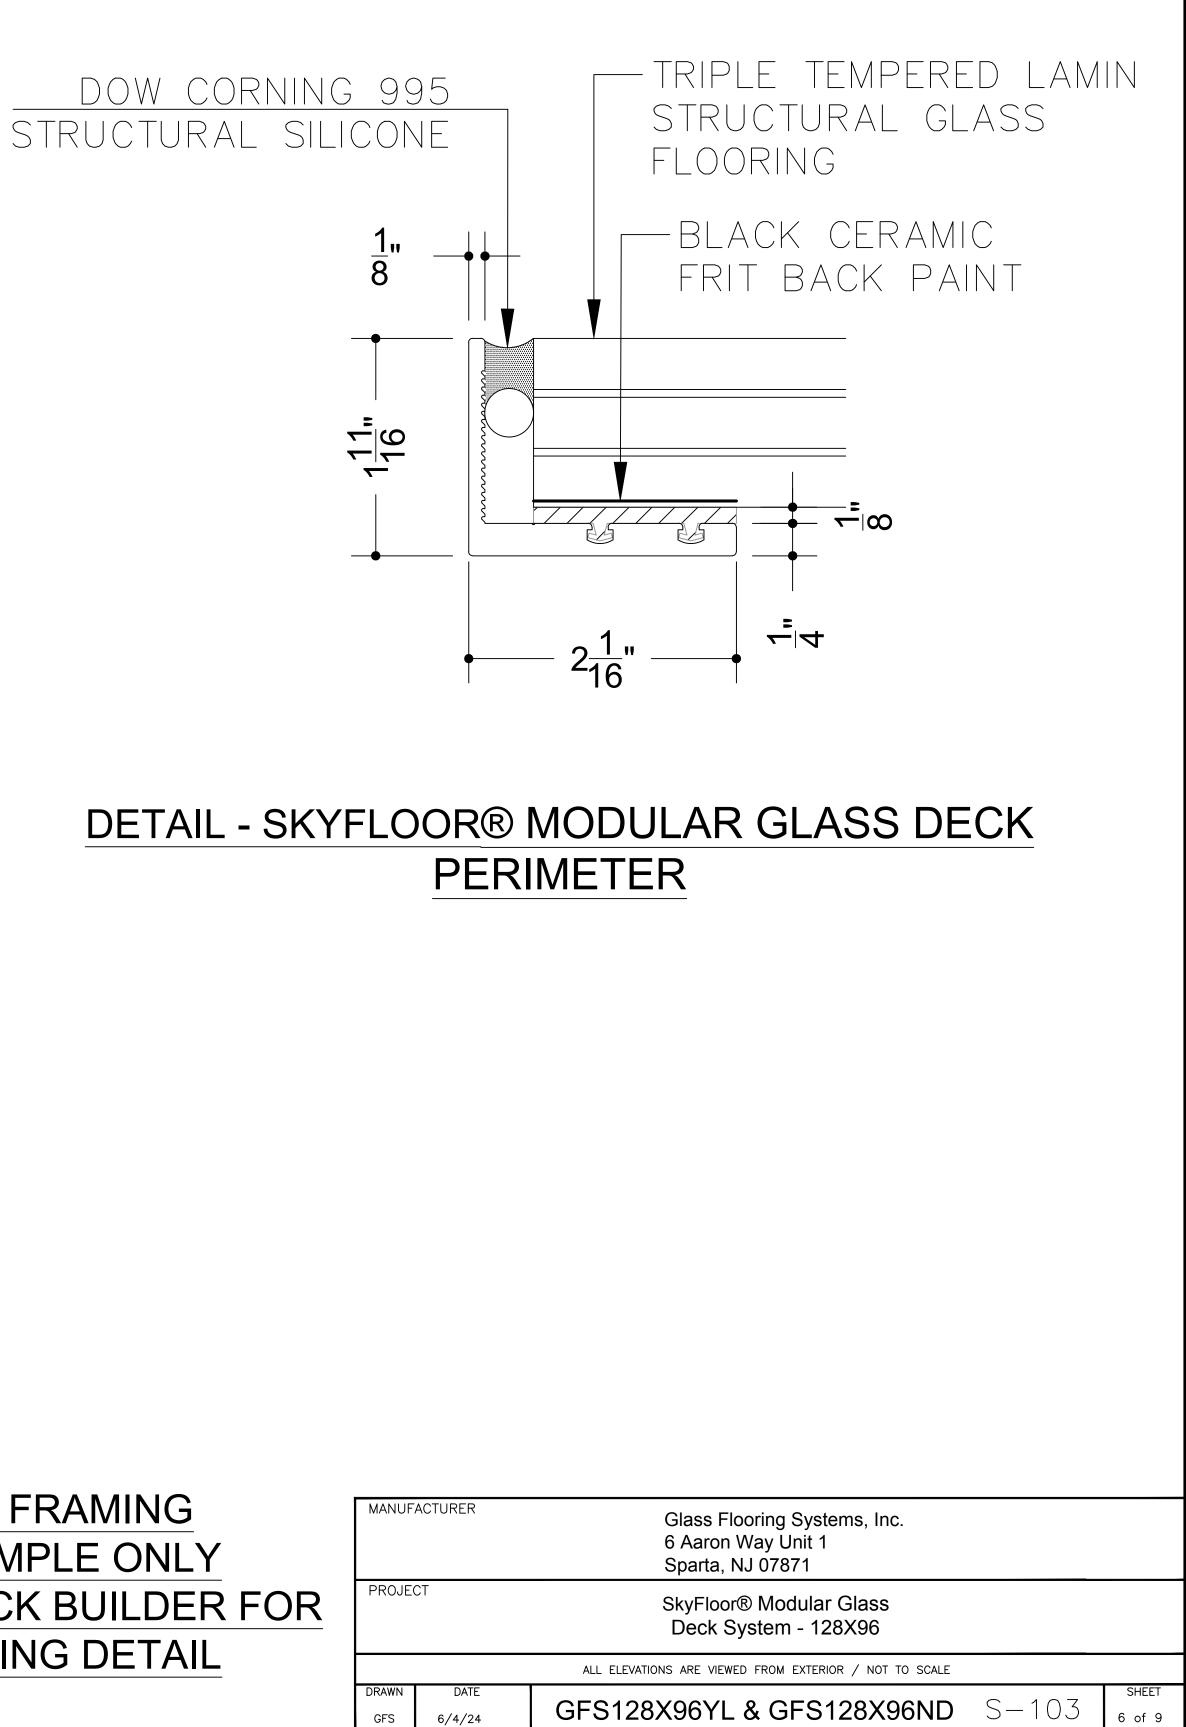

### SUPPORT DECK FRAMING SHOWN FOR EXAMPLE ONLY PLEASE REFER TO DECK BUILDER FOR ACCURATE FRAMING DETAIL

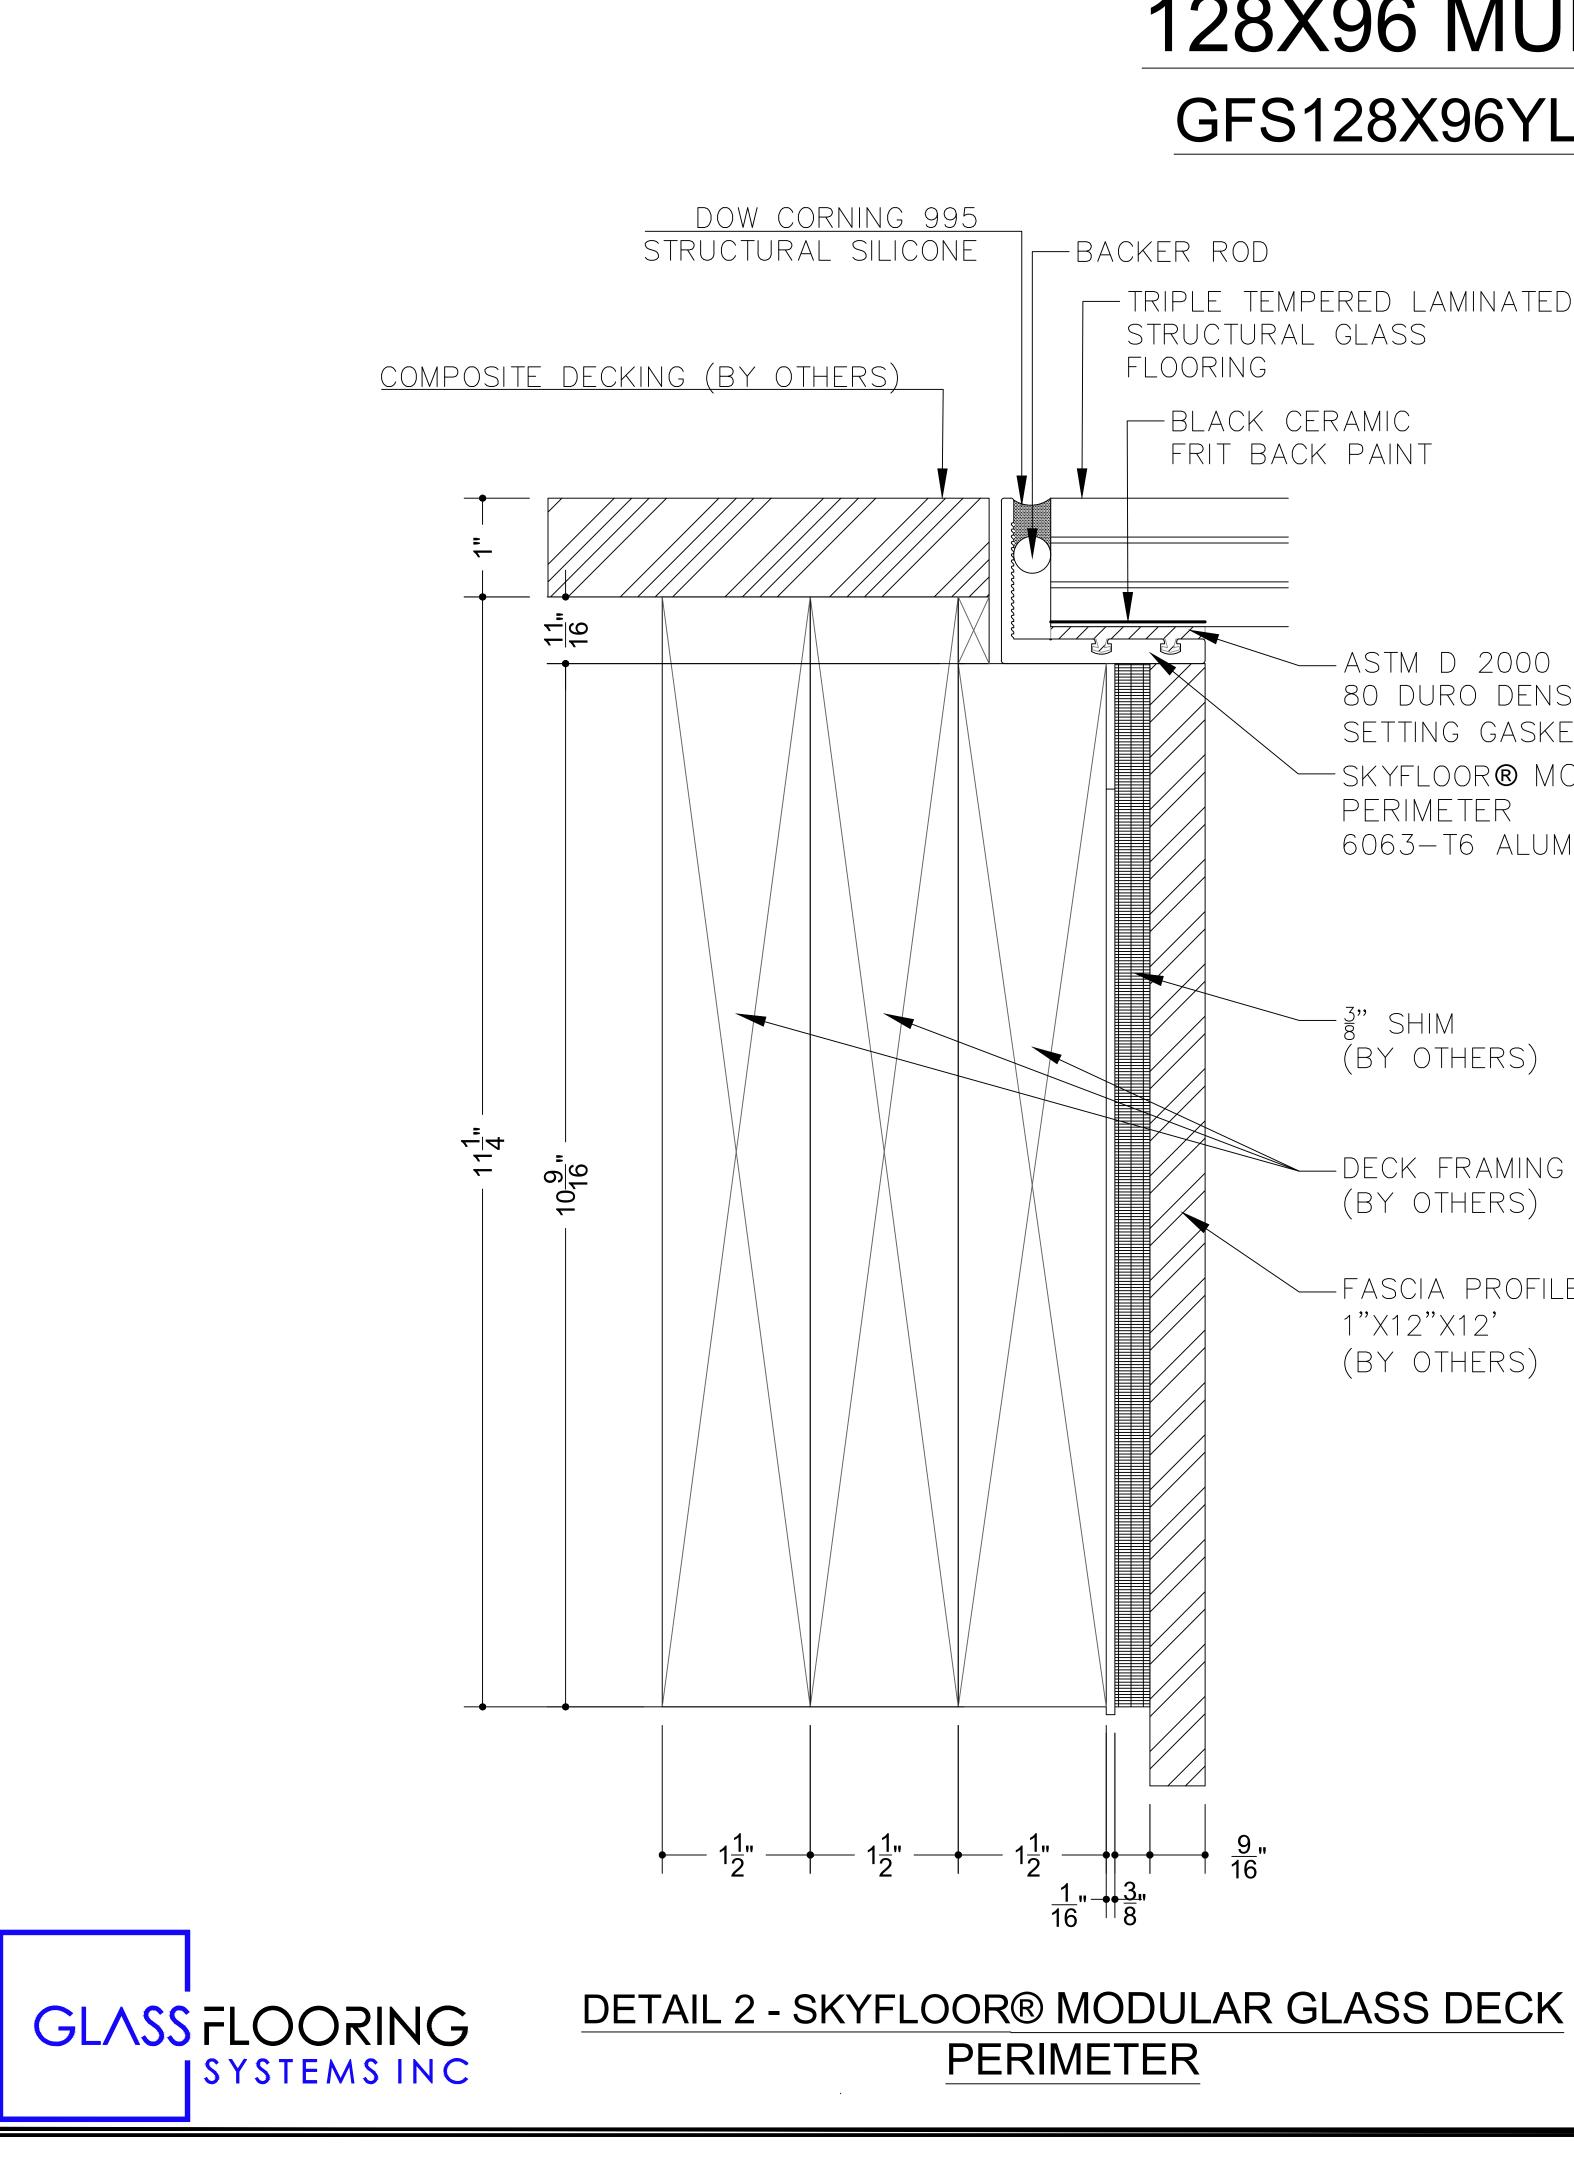

-BACKER ROD

TRIPLE TEMPERED LAMINATED STRUCTURAL GLASS FLOORING


BLACK CERAMIC FRIT BACK PAINT

STRUCTURAL SILICONE


-ASTM D 2000 80 DURO DENSE EPDM SETTING GASKET (BLACK) -SKYFLOOR® MODULAR DECK PERIMETER 6063-T6 ALUMINUM -<u>3</u>" SHIM (BY OTHERS) -DECK FRAMING (BY OTHERS) -FASCIA PROFILE 1"X12"X12' (BY OTHERS)

<u>9</u>" 16

SUPPORT DECK FRAMIN SHOWN FOR EXAMPLE ON PLEASE REFER TO DECK BUILD ACCURATE FRAMING DET

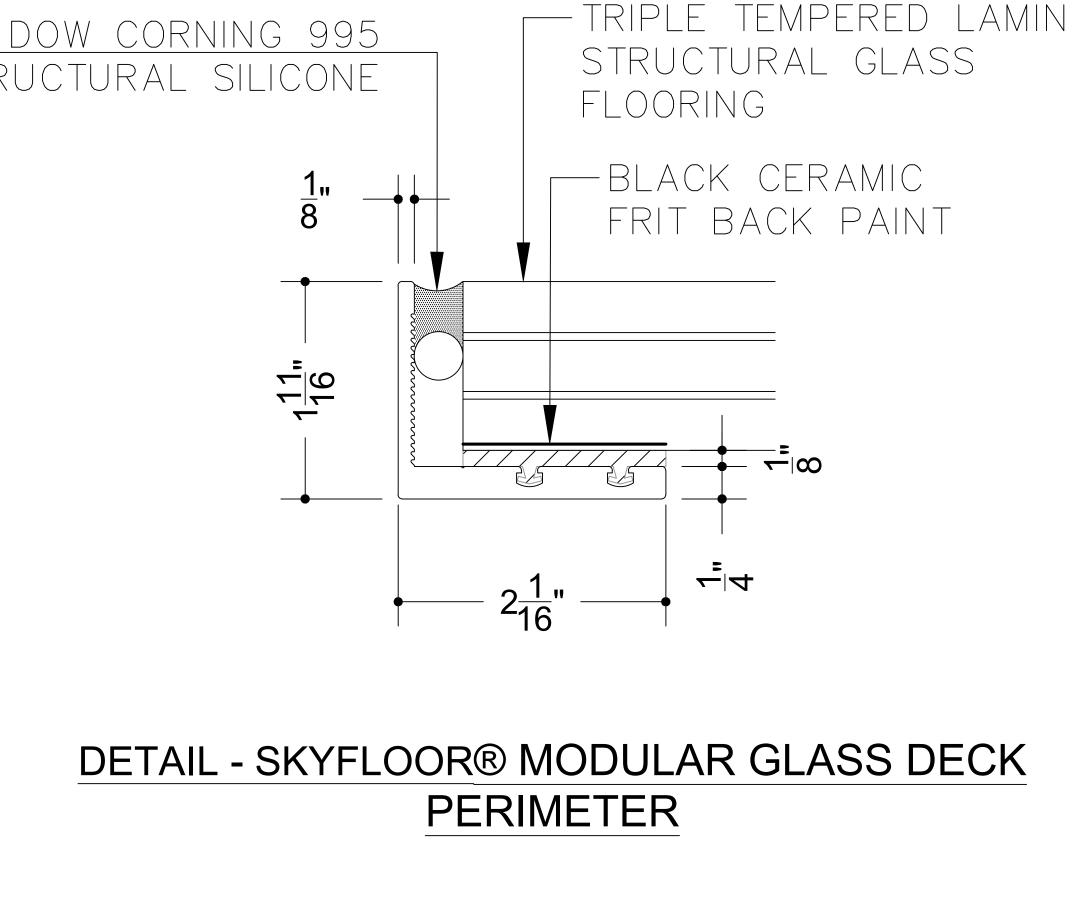


<u>G</u> ILY	MANUFACTURER	Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871				
DER FOR	PROJECT	SkyFloor® Modular Glass Deck System - 128X96				
AIL		ALL ELEVATIONS ARE VIEWED FROM EXTERIOR / NOT TO SCALE				
	DRAWN DATE GFS 6/4/24	GFS128X96YL & GFS128X96ND	S-104	SHEET 7 of 9		

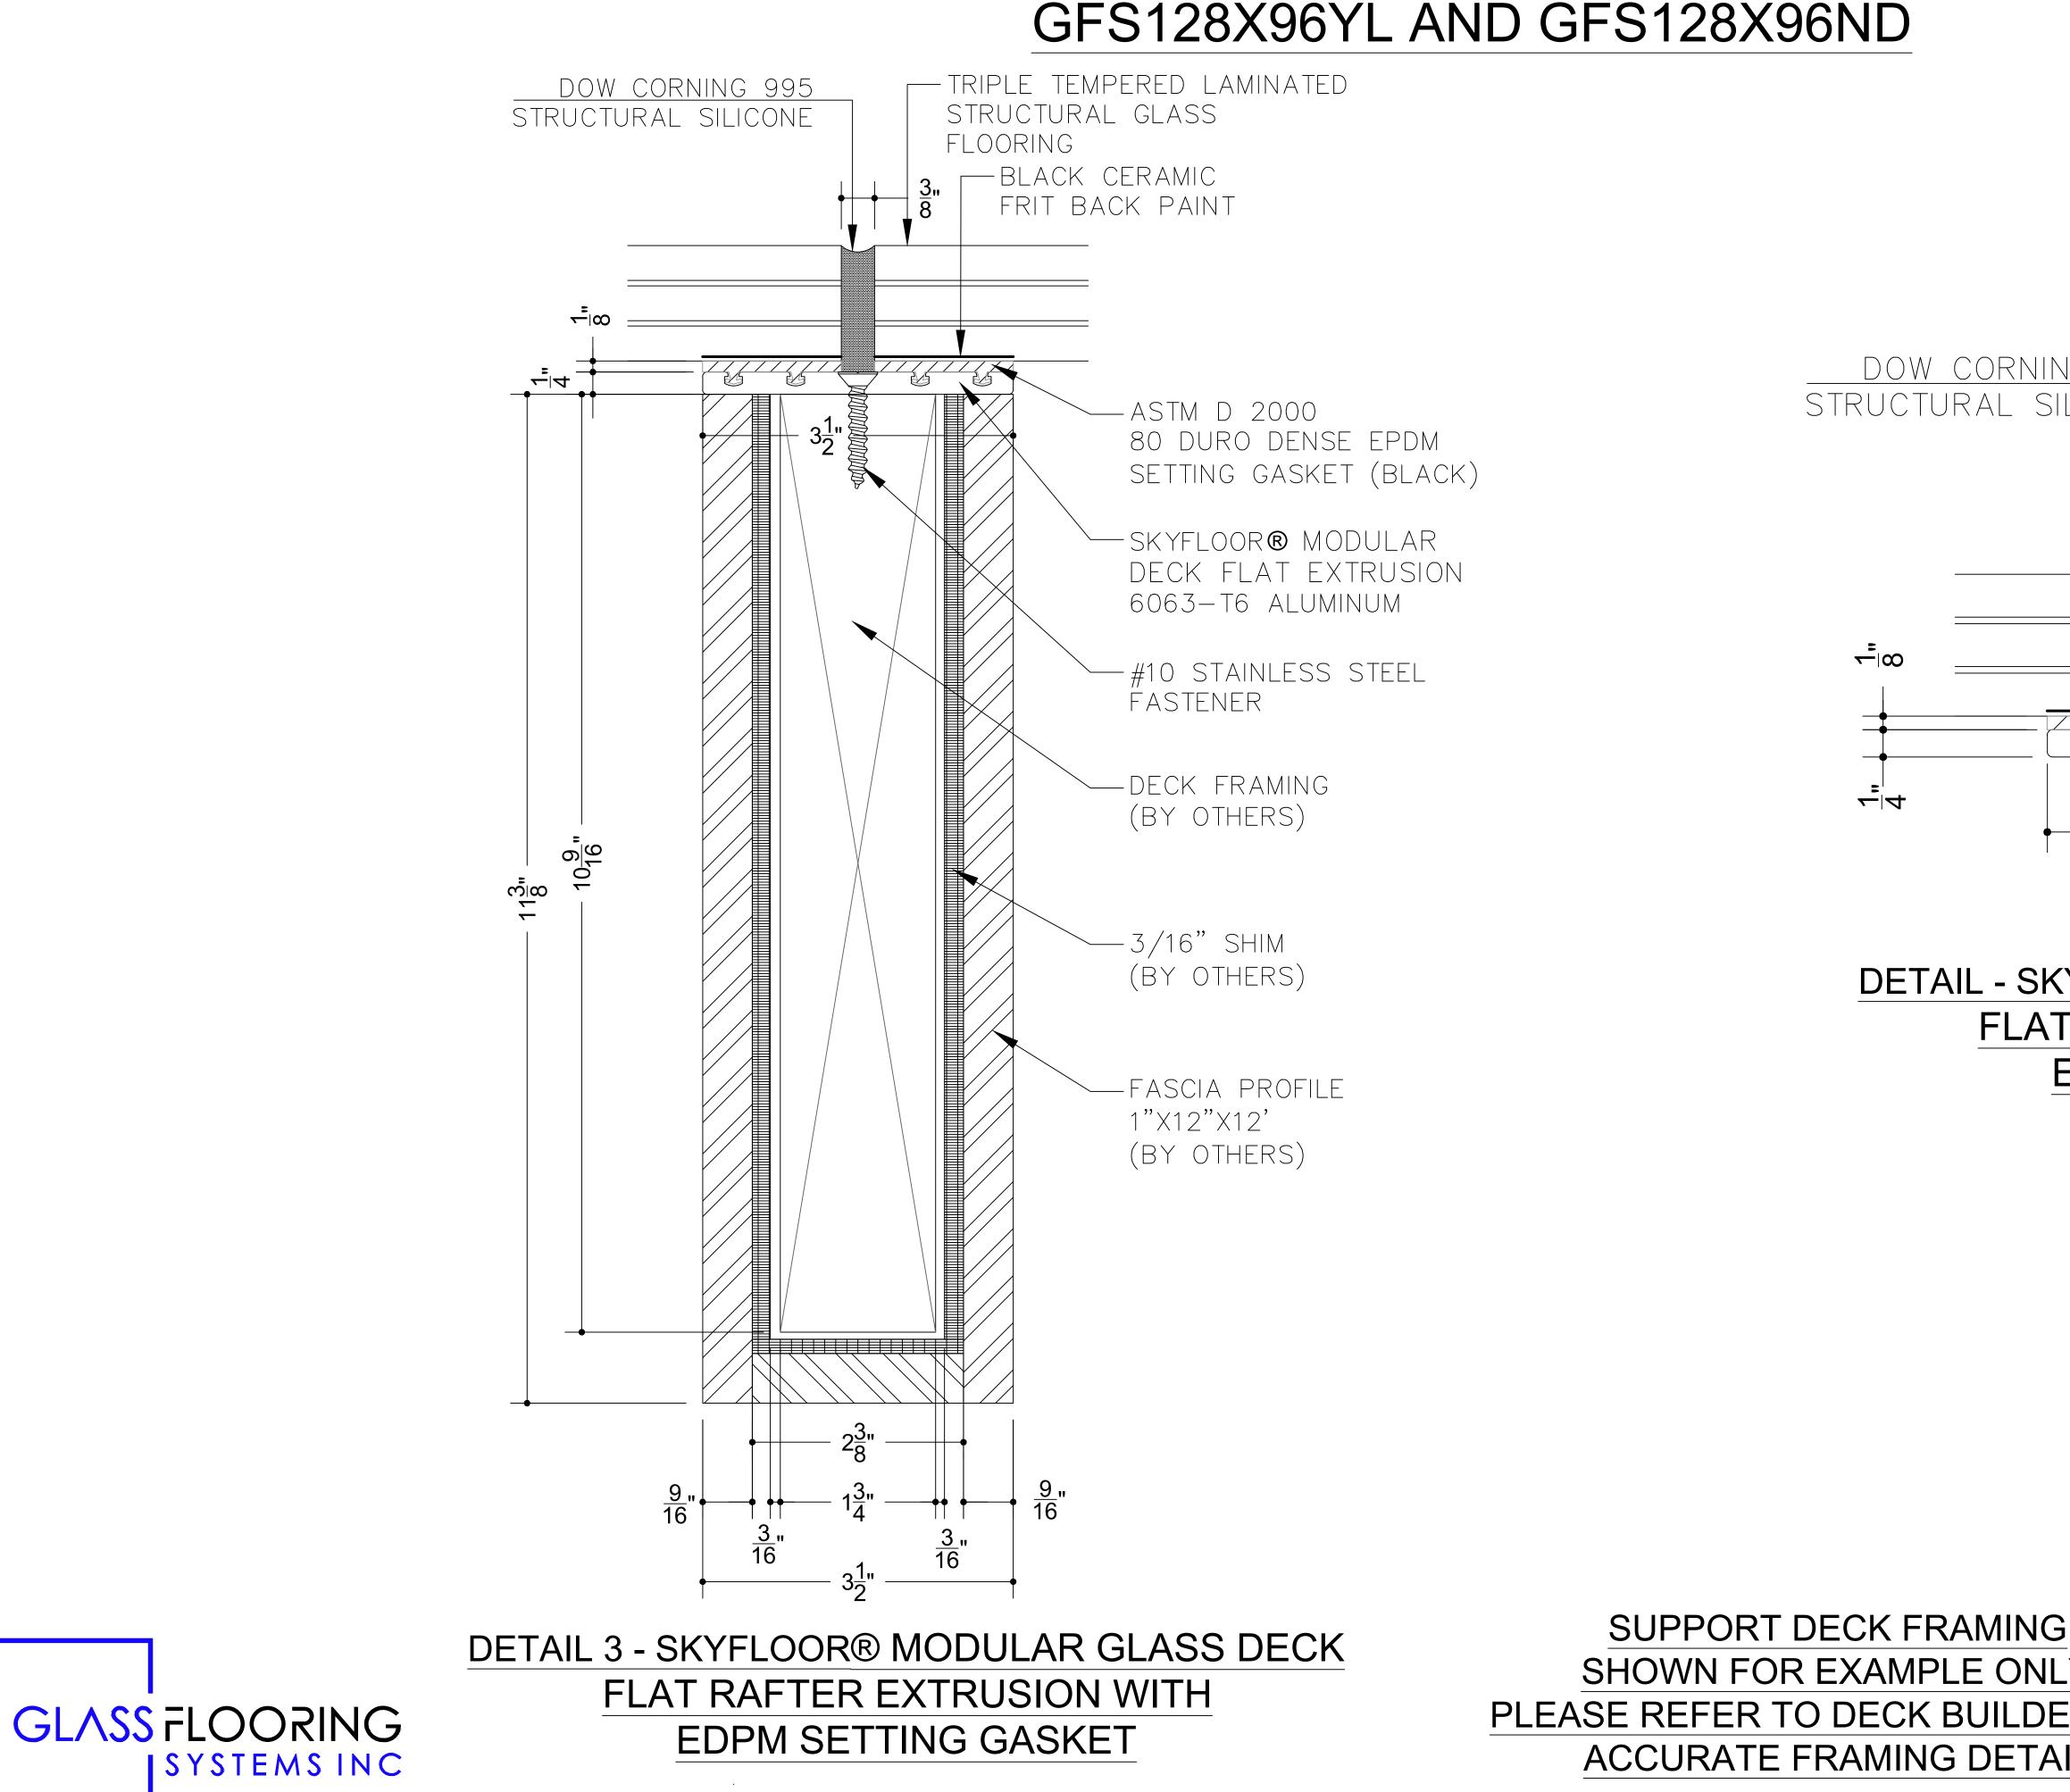

SUPPORT DECK FRAMING SHOWN FOR EXAMPLE ONL PLEASE REFER TO DECK BUILDE ACCURATE FRAMING DETA

<u>IG 995</u> LICONE	TRIPLE TEMPERED LAMINA STRUCTURAL GLASS FLOORING BLACK CERAMIC FRIT BACK PAINT
	$\frac{1}{2}$
YFLOOR RAFTEF	MODULAR GLASS DECK REXTRUSION WITH TTING GASKET
Y R FOR	MANUFACTURER Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871 PROJECT SkyFloor® Modular Glass Deck System - 128X96
	ALL ELEVATIONS ARE VIEWED FROM EXTERIOR / NOT TO SCALE           DRAWN         DATE         SHEET           GFS         6/4/24         GFS128X96YL & GFS128X96ND         S-105         8 of 9

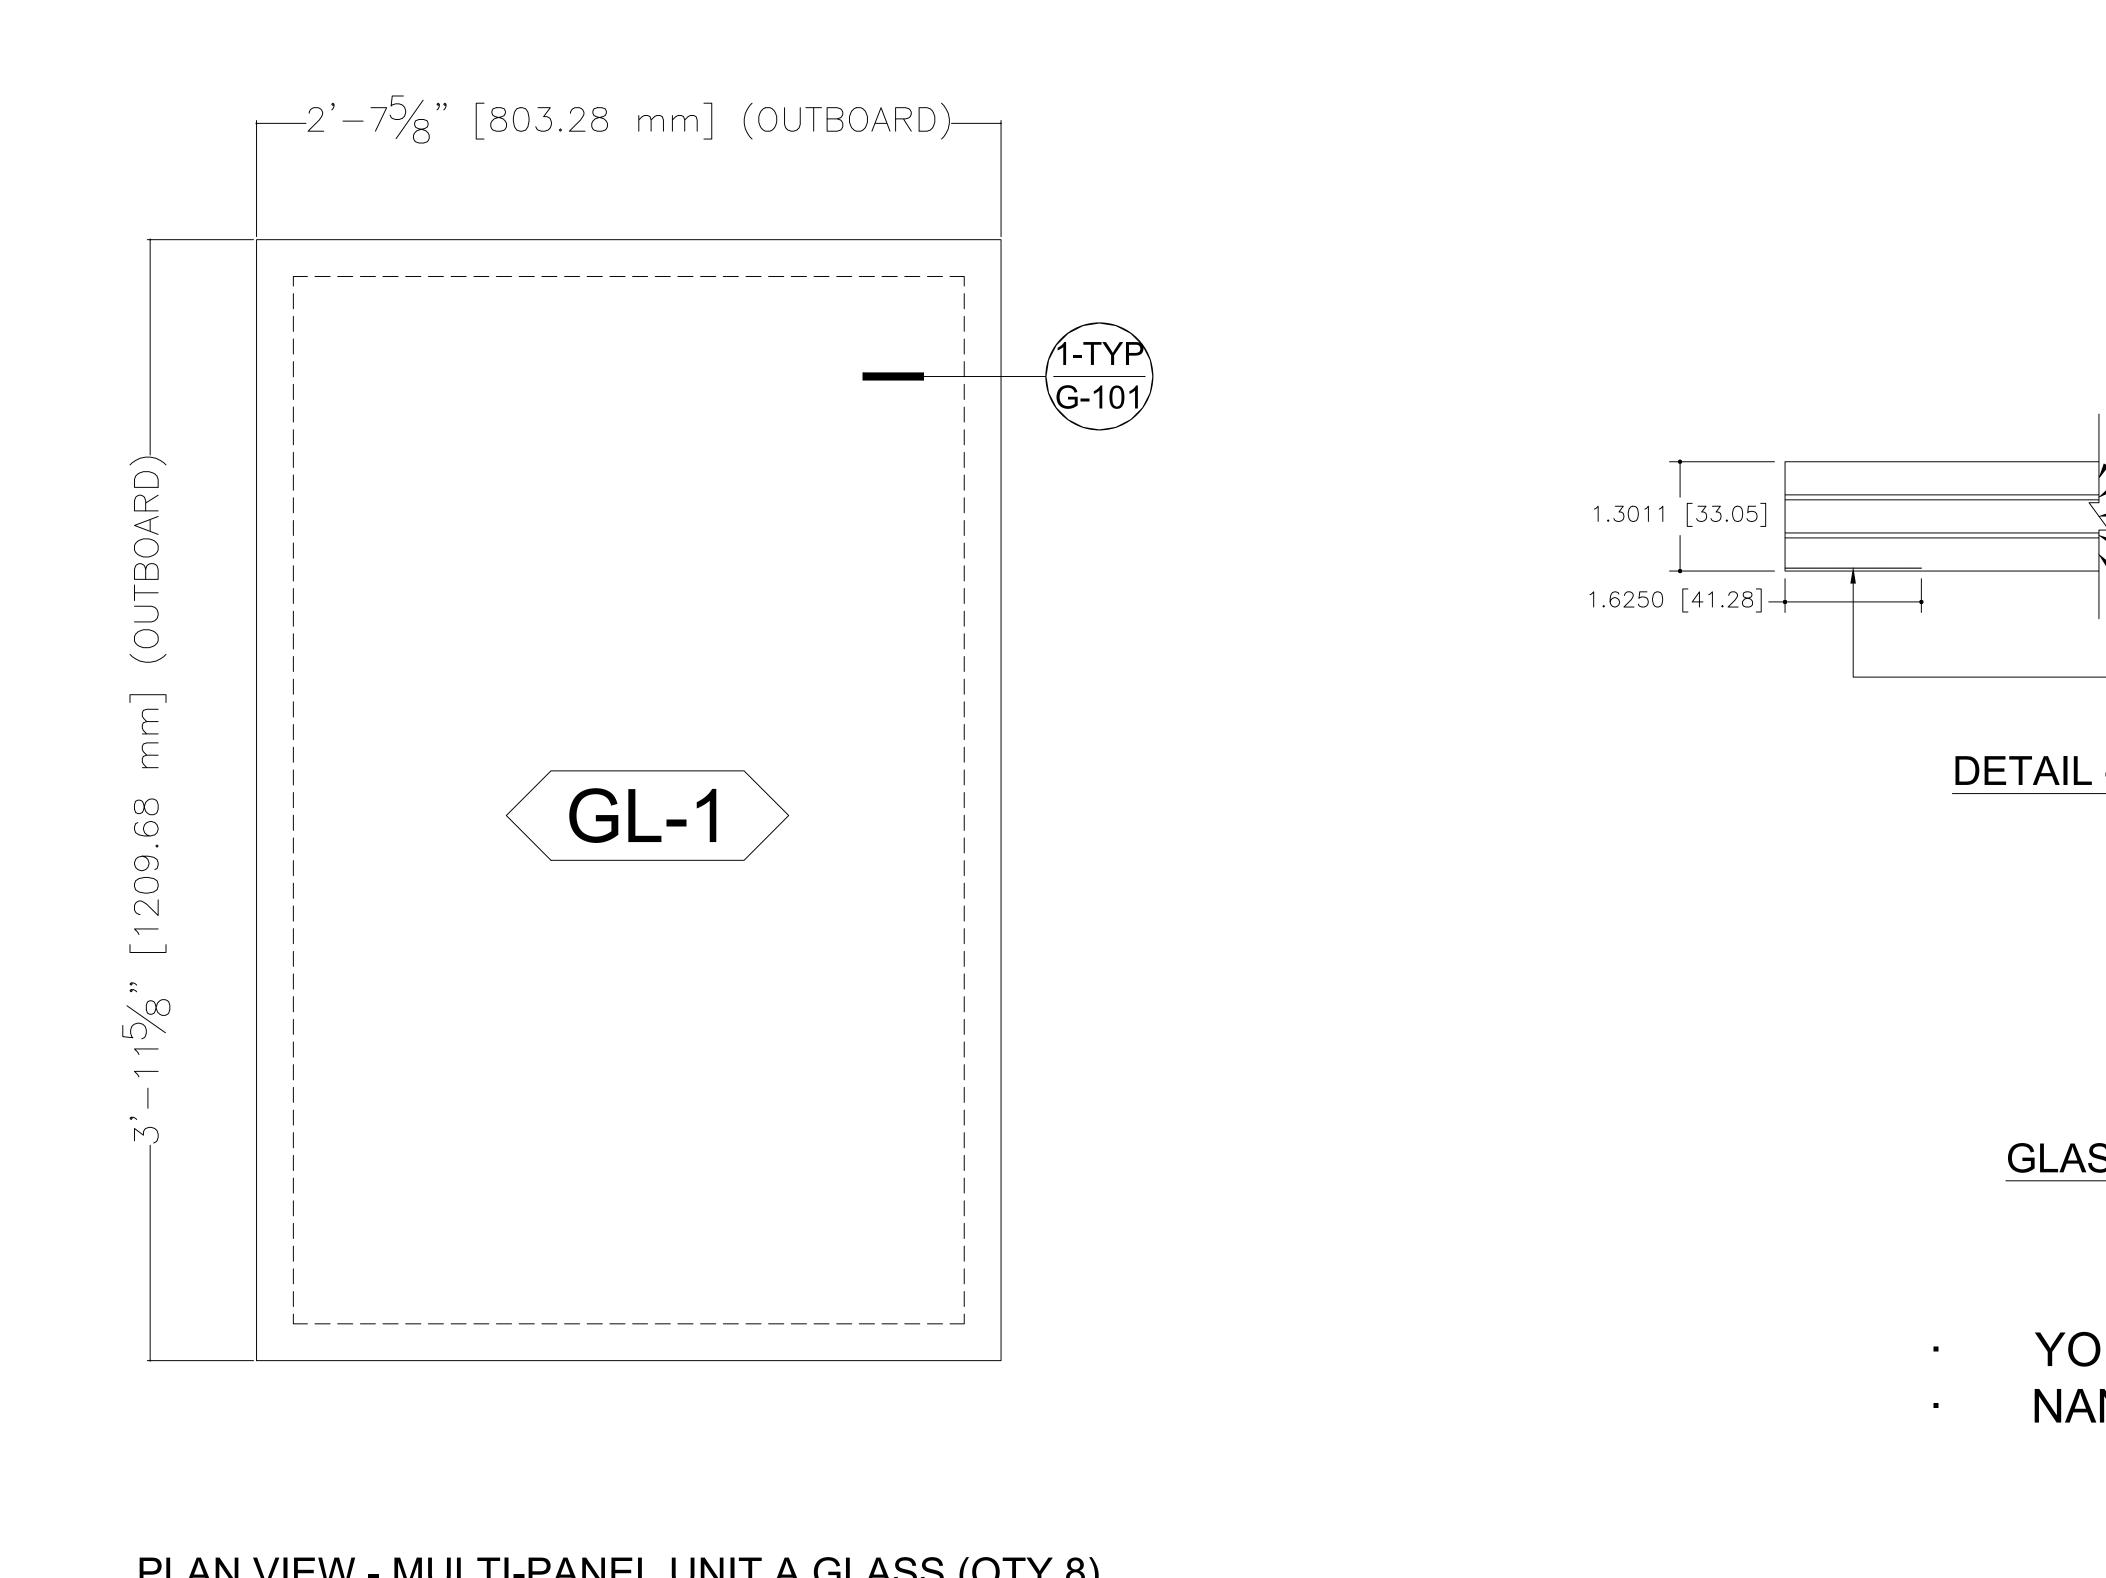

PLAN VIEW - MULTI-PANEL UNIT A GLASS (QTY 8)



# 128X96 MULTI-PANEL UNIT GFS128X96YL AND GFS128X96ND

MANUF	ACTURER	Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871		
PROJE	CT	SkyFloor® Modular Glass Deck System - 128X96		
DRAWN GFS	DATE 6/4/24	GFS128X96YL & GFS128X96ND	G-101	SHE 9 of

### YORLUX™ NANODOT®

### GLASS TEXTURES

### DETAIL - GLASS ASSEMBLY

\_10MM TOP LAYER -LOW IRON TEMPERED YORLUX OR NANODOT (TOP) - 1.52MM INTERLAYER DG STRUCTURAL -BACK PAINTING (BLACK)